


Faster Fiber Management Solutions

Fast-Drop Fiber Bend Radius Control Modules provide the BICSI recommended minimum bend radius for fiber optic cables, assuring consistent data transmission. Molded of UL94 V-0 flame retardant, impact resistant polycarbonate and rigid enough to withstand large bundle loads. NEBS compliant.

The universal Fast-Drop quickly snaps on to any panel edge up to 0.104" (2.7mm), retained by a RoHS compliant plated steel slip. May be screw or tab mounted to the cabinet to make service loops and or preassembled assembly per the Rack Mount Panel Array or Coiling Clip or stacking via slotted side design.



Patch Panel Egress

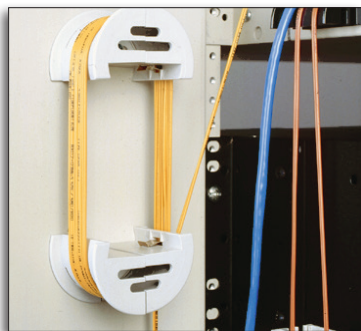

Service Loop/Take-up Reel




Fast-Drop 360° Fiber Routing Module

Features and Benefits:


- Protects cables from kinks
- Fits within standard unit racks
- Snaps into place
- Hook and loop strap containment option
- Flame retardant per UL94 V-0
- RoHS compliant
- Versatile assembly options
- Protects cables and tubing from kinks and micro bends

Applications and Uses:

- Fiber - FTTH or FTTP cabling
- Patch panels, control boxes
- Racks, cabinets, and enclosures
- Data centers/central
- Telecom switches and base stations
- Medical, x-ray, and imaging equipment
- Industrial equipment, Electrical wiring,
- Hydraulic, pneumatic and tubing/hoses

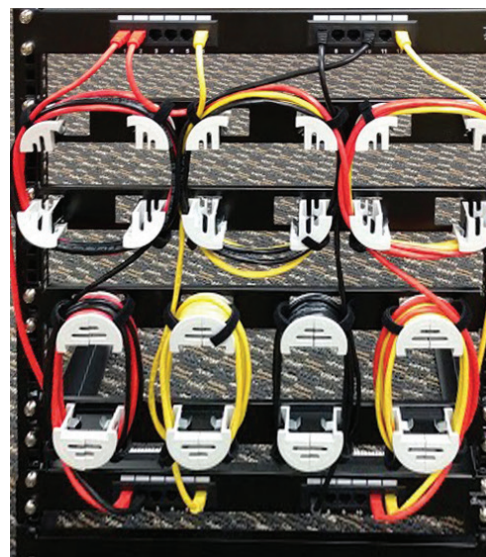

Rack Mount Fiber Array Panel

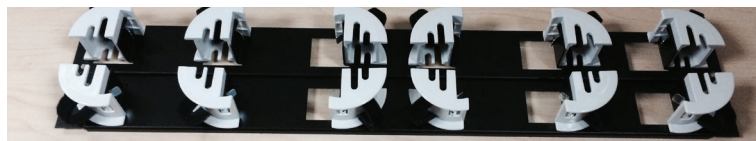

Part No. 321-FAV-1B-SL-HL



Part No. 321-FAV-1B-6-L-HL




Part No. 321-FAV-1B-3/3-OUT-HL

Fast-Drop™


Fiber Bend Radius Control Module

Specifications:

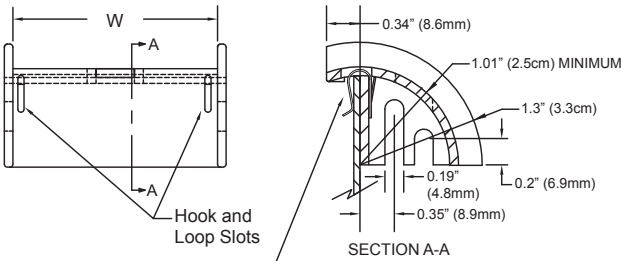


RoHS compliant plated steel clip retains Fast-Drop securely on up to 0.104" (2.7mm) sheet thickness.


Material: Polycarbonate
Flammability: UL94 V-0
Color: Black or Beige
Typical Wall Thickness: 0.090" (2.3mm)



321-1




321-2



321-3


Mounting Options:

Side Screw Mounting

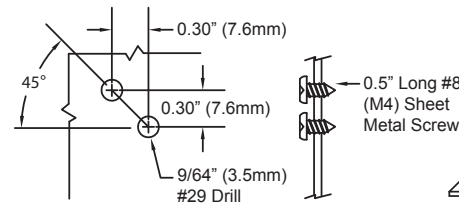

Drill one hole per drill pattern above. Insert first screw and mount Fast-Drop. Use Open slot to spot and drill the second hole and insert second screw.


Vertical Tab Mounting

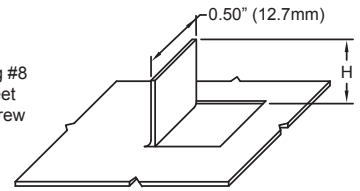


P/N	H
321-1	0.94" (2.4mm)
321-2	1.34" (3.4mm)
321-3	1.94" (4.9mm)

Optional: Include slot tab to lock clip in place.

Rack Mount Panel Array Hole Pattern



360° Routing Fiber Module Hole Pattern



Module Part Numbers and Sizes:

Part No.	Color	Max Bundle Width (W)		Overall Width	
		Inches	cm	Inches	cm
321-1A	Black	1.00	2.5	1.18	2.96
321-1B	Beige				
321-2A	Black	1.75	4.4	1.93	4.86
321-2B	Beige				
321-3A*	Black	3.00	7.6	3.18	8.06
321-3B*	Beige				

For Hook and Loop Straps add -HL to part number suffix (i.e. 321-1A-HL)

*3.00" Fast-Drop has no screw mounting slots

Rack Mount Fiber Array Panel

Part Number	Size & Color	Module	Orientation
321-FAV	1 (A or B)	6	Left or Right
321-FAV	1 (A or B)	3/3	Split
Part Number Examples			
321-FAV-1B-6R-HL	1" RC, Color: Beige, with 6 oriented right w/ HL Strap		
321-FAV-1A-3/3-IN	1" RCM, Color: Black, with oriented 3 L and 3 R, no HL Strap		

Fast-Drop® 360° Fiber Routing Module

Part Number	Size & Color
321-FRM	1 (A or B)
321-FRM	3 (A or B)
	Example: 321-FRM-1A-HL